



# IGNIS |

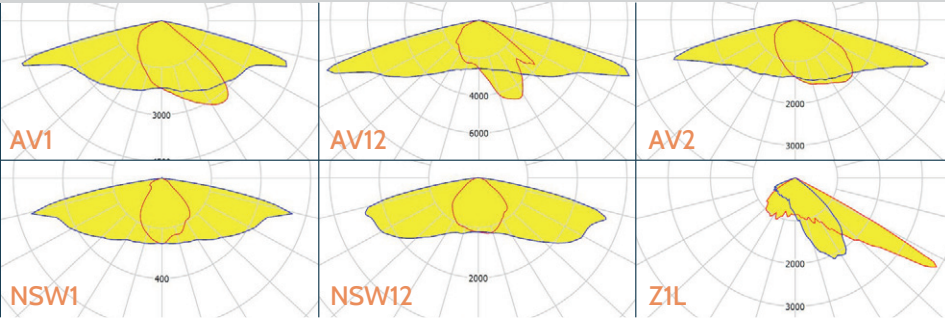

# Introducing IGNIS I

The IGNIS 1 is our mid-size luminaire in our IGNIS family. Designed to replace 150W and 250W HPS, with market leading optical performance and uniformity without compromising on lumens per watt or reliability. Versatile, the IGNIS 1 is available in high output or CLO optimised LED chip configurations to best suit your needs, for peak performance or hitting energy saving targets. The IGNIS range offers installation flexibility with Lumen Boost; tune your lantern stock to the desired output quickly and safely to suit your lighting needs.

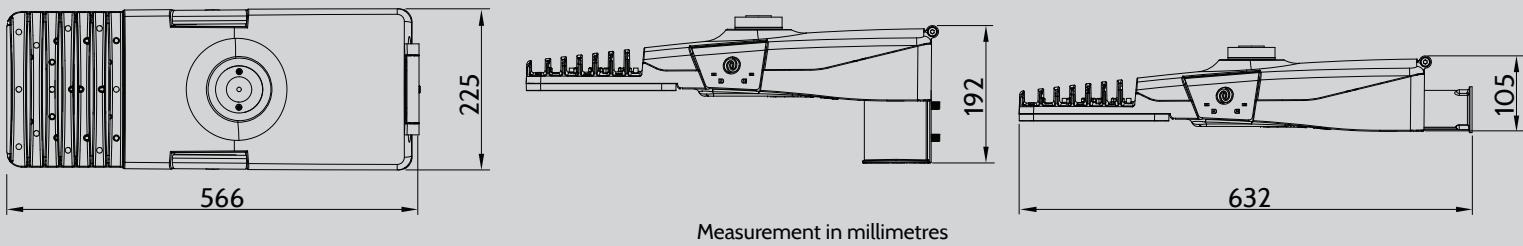

## Product Features



-   
SmartCity Ready
-   
Tool Free Access
-   
CLO Available
-   
IP66
-   
Upto IK08
-   
Preset Dimming
-   
ZEBRA lens available
-   
Surge Protection
-   
Tilt angle adjustment  
+10° to -15°
-   
Lightweight  
LM6 aluminium

## Lantern Information

Weight	8.2 kg
Windage	0.048 m <sub>2</sub>
RAL codes	Black: RAL 9004 Grey: RAL 7040
Mounting sizes	76, 60, 42, 34mm
Operating temperature	-40°C - 50°C

Visit: [www.orange tek.co.uk](http://www.orange tek.co.uk)  
to find out more or call our sales Team

AUS : +61 450 727 253  
NZ: +64 225 160 579

All facts and figures correct at time of printing, subject to change.

## Lumen Boost

Tune your driver and lumen output to provide the specific light level required, reducing your lantern variations. Photometry is available in incremental lumen steps to simplify design process and maximise energy savings.

LED Quantity	Lumen output range	RA/CRI index	CCT	Lumens per watt
36 & 72 LEDs	2800 - 16,500 lumens	>70 Standard	3000k, 4000k,	Up to 140 lm/w

Website

