



VLR130

Wall luminaires surface mounted

1/5

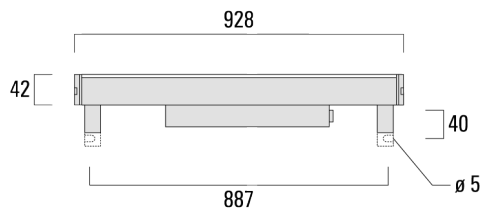

Description

IP67, Class I. IK09. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. PMMA cover. Silicone rubber gasket. Linear PMMA LED lens. 1.2 m connecting cable, UV stabilized. Luminaire is factory sealed and does not need to be opened during installation and can be tilted up to 180°. Integral LED driver with DALI interface. Separate LED driver on request.

VLR130





Wall luminaires surface mounted

2/5

we-ef

Specifications

Material Specification

Body:	Marine-grade, all-aluminium construction
Lens:	PMMA
Colours:	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium  RAL9016 Traffic white
Gasket:	Silicone rubber gasket
Fasteners:	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection:	IP67
Impact protection:	IK09
Corrosion protection:	5CE. 5CE+Primer optional

Electrical Specification

Power supply:	240V / 50 Hz
Driver / Ballast:	Integral LED driver with DALI Interface
Cable:	1.2 m of flexible cable

Lifetime

Ta=40° L90B10 > 90000h

Warranty

The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

VLR130









Wall luminaires surface mounted

3/5



Choices

Light Distributions

	symmetric linear, wide beam [LB]
	symmetric linear, medium beam [LM]
	symmetric linear, narrow beam [LE]
	symmetric linear, very narrow beam [LEE]
	symmetric linear, wide beam [LB/IW]
	symmetric linear, medium beam [LM/IW]
	symmetric linear, narrow beam [LE/IW]
	asymmetric linear, wallwash [LA10]

Nominal Lumen


4320

Nominal Watt

30


Colour Temperatures

 2700 K

 3000 K

 4000 K

Colours

 RAL9004 Signal black

 RAL9006 White aluminium

 RAL9007 Grey aluminium

 RAL9016 Traffic white









VLR130

Wall luminaires surface mounted

we-ef

4/5

Configurations

Light Distributions	Part ID	Light Source	Rated Lumens	Rated Input Power	CRI	Weight	Link
 symmetric linear, wide beam [LB]	187-0537	LED-48/30W / 225 mA - 2700 K	2873.6	35	80	3.25	📄 ↗
	187-0025	LED-48/30W / 225 mA - 3000 K	2873.6	35	80	3.25	📄 ↗
	187-0042	LED-48/30W / 225 mA - 4000 K	2873.6	35	80	3.25	📄 ↗
 symmetric linear, medium beam [LM]	187-0538	LED-48/30W / 225 mA - 2700 K	3210.6	35	80	3.25	📄 ↗
	187-0003	LED-48/30W / 225 mA - 3000 K	3210.6	35	80	3.25	📄 ↗
	187-0039	LED-48/30W / 225 mA - 4000 K	3210.6	35	80	3.25	📄 ↗
 symmetric linear, narrow beam [LE]	187-0539	LED-48/30W / 225 mA - 2700 K	3151.9	35	80	3.25	📄 ↗
	187-0007	LED-48/30W / 225 mA - 3000 K	3151.9	35	80	3.25	📄 ↗
	187-0040	LED-48/30W / 225 mA - 4000 K	3151.9	35	80	3.25	📄 ↗
 symmetric linear, very narrow beam [LEE]	187-0540	LED-48/30W / 225 mA - 2700 K	3608.9	35	80	3.25	📄 ↗
	187-0011	LED-48/30W / 225 mA - 3000 K	3608.9	35	80	3.25	📄 ↗
	187-0041	LED-48/30W / 225 mA - 4000 K	3608.9	35	80	3.25	📄 ↗
 symmetric linear, wide beam [LB/IW]	187-0586	LED-48/30W / 225 mA - 2700 K	1277.3	35	80	3.25	📄 ↗
	187-0496	LED-48/30W / 225 mA - 3000 K	1277.3	35	80	3.25	📄 ↗
	187-0497	LED-48/30W / 225 mA - 4000 K	1277.3	35	80	3.25	📄 ↗
 symmetric linear, medium beam [LM/IW]	187-0587	LED-48/30W / 225 mA - 2700 K	1603.2	35	80	3.25	📄 ↗
	187-0498	LED-48/30W / 225 mA - 3000 K	1603.2	35	80	3.25	📄 ↗
	187-0499	LED-48/30W / 225 mA - 4000 K	1603.2	35	80	3.25	📄 ↗
 symmetric linear, narrow beam [LE/IW]	187-0588	LED-48/30W / 225 mA - 2700 K	1670.5	35	80	3.25	📄 ↗
	187-0500	LED-48/30W / 225 mA - 3000 K	1670.5	35	80	3.25	📄 ↗
	187-0501	LED-48/30W / 225 mA - 4000 K	1670.5	35	80	3.25	📄 ↗
 asymmetric linear, wallwash [LA10]	187-0550	LED-48/30W / 225 mA - 2700 K	3074.8	35	80	3.25	📄 ↗
	187-0015	LED-48/30W / 225 mA - 3000 K	3074.8	35	80	3.25	📄 ↗
	187-0330	LED-48/30W / 225 mA - 4000 K	3074.8	35	80	3.25	📄 ↗
























VLR130

Wall luminaires surface mounted

5/5



Related Families / VLR100

Family		Dimensions	Wattage	Nominal Lumen	Links	
					Links	Download Data Sheet
VLR110		328 x 42	10 W	1440		
VLR120		628 x 42	20 W	2880		
VLR130		928 x 42	30 W	4320		
VLR140		1228 x 42	40 W	5760		
VLR150		1528 x 42	50 W	7200		
VLR120 [LA10]		628 x 42	20 W	2880		
VLR130 [LA10]		928 x 42	30 W	4320		
VLR140 [LA10]		1228 x 42	40 W	5760	